




Semi-automatic stretch wrapping machine OP 161TWIST X

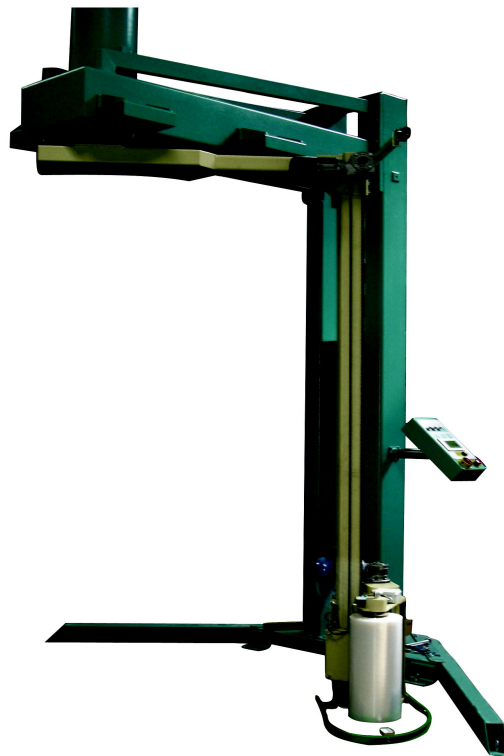

Stretch wrapper with rotating arm OP 161TWIST X is designed especially for loads that are lightweight, tall and unstable or too heavy to rotate using a turntable system.

The stretch wrapper with rotating arm is the ideal solution for environments with liquid spillage, corrosive products and where equipment washdown is performed.

Performance

- Peak Production Speed 25-35 loads/hr
- Maximum Load Size 1200 x 1000 mm
- Maximum Load Height 2400 mm
- Maximum Load Weight Floor Capacity
- Soft start/stop
- PLC Siemens S7
- Touch panel
- 10 additional programmes

Load Handling

- Wrap Arm Diameter 2800 MM
- Wrap Arm Speed (Variable) 12 RPM

Options

- Stainless steel
- Pallet conveyor
- * -C
- Top plate

Film Delivery System

- Electromagnetic brake system up to 140%
- Roll Carriage Standard
- Wrapping Force Variable (Electric)
- Standard Film Width 500 mm
- Option:
 - POWER 1000 Mechanical pre-stretch system 100%, 150%
 - POWER 2000 Variable electrical pre-stretch system 140%, 200%, 280%
 - POWER 3000 A Electronic pre-stretch system 0-300%
 - POWER 3000 B Digital pre-stretch system 0-400%

Machine Shipping Weight

- Approximate Shipping Weight 800 kg

Service Requirements

- Electric 230 VAC, 400 VAC , 50 Hz
- Service Support 24 hrs - 7 days/wk



Pertokoan Sanan, Jl.Tumenggung Suryo no.21A MALANG – Jawa Timur
Phone / Fax : (0341) 936 8480 HP : 081 252 160 260 / 0816 1568 0303
E-mail : info@mesin77.com; carmelhill77@gmail.com
www.mesin77.com